



DAS SYSTEMS

- PROJECT WORKS
- PIPELINE PROJECTS
- CONVEYOR PROJECTS
- MFG. MATERIAL HANDLING EQUIPMENTS & SOLUTIONS
- INSTALLATION / MODIFICATION MATERIAL HANDLING SYSTEMS



OFFICE

SHUBHASHRI, E-1, Flat No. - 407
Jai Ganesh Vision, Akurdi
Pune - 411 035.
Maharashtra, INDIA.



WORKS

Gat No.173,
Ganesh Nagar,
Rupeenagar Road, Talwade
Pune - 411 062. Maharashtra
INDIA.



CONTACT

Mobile:- +91 9011080139
dassystems.pune@gmail.com



WEBSITE

www.dassystemsmech.com

Monorail conveyor / I-beam conveyor

Monorail overhead conveyor systems track is specially roller I- beam sections.

I-beam overhead conveyor track is available in 3" 4" 6" sizes.

I-beam monorail trolley conveyor track is stocked 18 feet length and can be cut to any required lengths. "X" type rivet less chain used in **overhead trolley conveyor system** the chain combines simple construction and exceptional strength. The chain is available in size x348, x458, x678.



Features:-

I-Beam monorail overhead Conveyors are designed for handling heavy materials / longer loops. Capacity - Heavy duty forged chain and trolleys

Overhead conveyors are designed for rugged, long term use

Drop forged, rivet less chain is highly flexible and requires no tools for assembly.

Open track and chain design, all components are exposed and visible

Specifications:-

Trolley size	6"	4"	3"	
Drop	10"	8"	7 3/16"	5 1/2"
Single trolley capacity	545	200	90	
Capacity with load bar arrangement	1000	400	180	
Chain size	6"	4"	3"	
I-beam size	ISMB 150x80	ISMB 125x70	ISMB 75x60	

Application:

- Material transfer
- Painting
- Surface coating
- Pretreatment plants
- Powder coating lines
- Plastic painting lines
- Delivery lines
- Storage lines

Bi Planner Chain Conveyor / Four Wheel Chain Conveyor

A widely used overhead conveyor for load capacity up to 100kg

Four Wheel Bi Planar Chain Overhead Conveyor are highly durable and available in different shapes and sizes according to the customization demand. The chain is available in. 6", 8", 10", 12" pitch. Minimum component hooking pitch is double.

Drive Unit: Sprocket type/caterpillar type is available,

Application:

- Material transfer
- Painting
- Surface coating
- Pretreatment plants
- Powder coating lines
- Plastic painting lines
- Delivery lines
- Storage lines



Chain pitch	6"	8"	10	12
Hooking pitch	300 mm	400mm	500mm	600mm
Capacity in KG single point hooking	50 -55	50-55	50-55	50-55
Load bar arrangement hooking pitch	600	800	1000	1200
Capacity with load bar arrangement with per hooking	100-110	100-110	100-110	100-110

Spares overhead conveyor



SLAT CONVEYORS

Slat conveyors :-

Slat conveyor functions by connecting discretely spaced slats with low friction roller chain. Slat conveyors are used to convey raw material, finish goods in vehicle assembly lines. These conveyors are mainly used in production lines, packaging lines, handling hot material in forging industry.

Features:-

- Rigid steel construction
- Easy to carry heavy load up to 10000kg
- Minimum down time and cost no maintenance
- Easy to customize the fixtures on the slats

Specification:-

Width	300mm to 1200mm
Length	2 meter to 35 meter
Speed	1 to 3 mtr/ min
Capacity	Up to 10000 kg
Material of the conveyor	MS / SS



Hing Belt / Steel Belt Conveyor



Applications:

- Material handling
- Load carrying
- Weight transfer

Specifications:

- Capacity: 1-100 ton
- Material: MS
- Length: 22 m

Steel Belt Conveyor has a robust size stabilizers which automatically come in contact with the ground when the forks reach a correct height. These are available in various load carrying capacities, multiple fork lengths and spans. These Conveyors easy-to-operate to assist in lifting or lowering the goods. Hinged metal belt is incredibly durable often used for machine chip and scrap removal.

Applications for this type of belting include:

- Wet or dry operation
- High temperature operation
- Machine tool chip removal
- Whole plant chip and scrap removal
- Die cast operations
- Parts handling
- Packaging operation
- Inspection
- Stamping operation

CHAIN CONVEYORS

Features :-

- Suitable to heavy impact loads
- No slippage and no transmission losses Cost effective
- Simple and reliable to convey the material



Chain conveyors are used to convey heavy unit loads, like pallets, grid boxes and industrial containers. Chain conveyors are with single or double chain strand in arrangement. The load is placed on the moving chains. The chain conveyors are used in forging industry, Furness, surface treatment, heat treatment plants etc.

Width	Customized
Length	1 meter to 15 meter
Speed	1 to 6mtr/ min
Capacity	700 to 800 kg / meter
Material of the chain	MS /SS

BELT CONVEYOR

Belt conveyors are used for the movement of the material from one position to other positions in production industry. Belt conveyors are mainly used in Assembly lines, food processing, pharmaceuticals, bag handling, packaging, auto components handling and inspection at various location.

Our belt conveyors are ...

- Robust design
- Simple construction
- Light weight
- Operational consistency
- Highly energy efficient
- Low maintenance



Specification :-

Width	100 mm to 1500mm
Length	1 meter to 25 meter
Speed	2 to 20 mtr/ min
Conveyor Belt material	PU/PVC
Supporting Structure	Aluminum / MS / SS
Load capacity	150kg/ mtr

TYPES OF BELT CONVEYOR

- Pu Belt Conveyor
- Pvc Belt Conveyor
- Canvas Belt Conveyor
- Teflon Belt Conveyor
- Nova Belt

D
A
S
S
Y
S
T
E
M
S

MOTORIZED ROLLER CONVEYOR



Motorized roller conveyor is manufactured in MS /SS round tube. The shaft with bearing at both ends with suitable load capacity is placed. The sprockets are in steel En-8 duly hardened coupled with roller. Also sprockets are located in SS material as per application. **PU Coated Roller Conveyors** are able to move heavy and awkward shaped items. Motorized roller conveyors are used to transfer boxes, bins, pallets. Gravity conveyors are used in transfer lines, logistics industry, ware houses, auto component handling, and food processing, dairy industries etc.

Surface option for rollers:-

- Zinc Plating
- Chrome Plating
- PU Coating

Features :


- Easy to install
- Rigid to convey heavy load
- Cost effective
- Simple and reliable to convey the material
- Dust cover for bearing housing

Specification:-

Width	up to 1000mm
Length	Up to 100 meter
Load capacity	Up to 2000kg
Material of the conveyor	MS /SS

COMPOUND/BALANCE WEAVE WIRE MESH BELT

Compound waves offer an extremely close and flat mesh for applications where very small items are being conveyed. Compound Balance weave is an economical, general use belt for medium load applications from 40 - 1500 degrees F. It is the most commonly used wire mesh conveyor belt worldwide including many food processing applications (from draining to cooling) as well as industries ranging from ceramic, glass and metalworking.

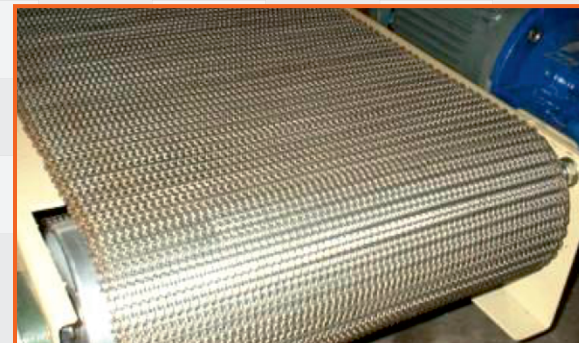

Cord weave belt is known within the industry as "Compound Balanced (CB)" belt. Compound balance weave has multiple spirals and cross roads per pitch. Which effectively creating a "belt within a belt". This compound structure closes up the spaces within the belt, it gives Compound balance weave its characteristic high density and flat surface.

Available metals :-

- 304 Stainless Steels,
- 316 Stainless Steels,
- 314 Stainless Steel,
- 316L, 330 Stainless Steel,
- 430 Stainless Steel,
- 35-19cb, 80-20 cb,
- Nichrome


Applications:

- Heat treating of small fasteners
- Furnaces curtain
- Electroplating
- Heat treatment
- Analysing
- Hardening
- Drying conveyors
- Baking food products
- Elevating
- De-elevating
- Transfer
- Forging industry

HONEY COMB BELT / FLAT STRIP BELT

Honey comb belt is constructed from formed cross rods and flat metal strips. Honey comb belt is good choice where both durability and open belt design is required. Honey comb belt open mesh construction allows quick & effective air circulation. Belt is easy to clean, easy to assemble.

Honey comb belt is also known as flat wire belt. The belt is straight running belt with extremely high strength to weight ratio.

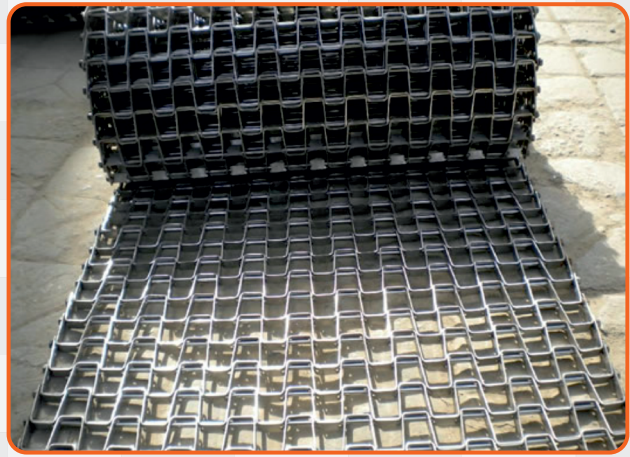

Application :-

- Casting
- Baking
- Drainage
- Packaging
- Drying
- Washing,
- Cooling
- Cooking
- Freezing
- Heating
- Weed clearing
- Sorting
- Recycling
- Loading
- Painting
- Assembly

Belt Material Available
SS304, SS316, ss310

Opening Sizes

- 1" x 1" ,
- 1/2 " x 1/2"
- 1/2" x 1"

● HEAVY DUTY BELTS:

1/2" Belt Height, with 5 mm cross rod for heavy duty belts

● STANDARD DUTY BELTS:

3/8" Belt Height, with 3mm cross rods for light duty belts

Sprocket Material :-


- **CAST IRON** : Cast from high grade iron
- **STAINLESS STEEL** : 304 Stainless (316 Stainless available on special order)
- **PLASTIC** : Uhmw polyethylene sprockets. Can withstand continuous temps up to 180 Deg F
- **STEEL** : Used for flangeless and 1/2 x 1/2 True series sprockets
Cast nylon-6 FDA approved

CHAIN WEAVE BELT CONVEYORS

(Engineering Series Roller Chain Weave Belt)

The Engineering Series Roller Chain conveyor belt is similar to the extended pitch roller chain, but is of heavier construction and greater strength. It has greater clearances than precision roller chain and is specifically designed for use in applications or environments, where dirt accumulation or inadequate lubrication may occur. It is typically used in handling heavy loads in washing and drying, for quench bath operations, for handling heavy stampings and forgings and similar work

Balance wave wire meshes can be driven by side chains using cross rods. These rods are located through mesh and through chains at the edges of mesh. Depending on the mesh cross pitch, cross rod may take the place through the cross wire. These cross rods are finished at the outside of chain edges with welded washer.

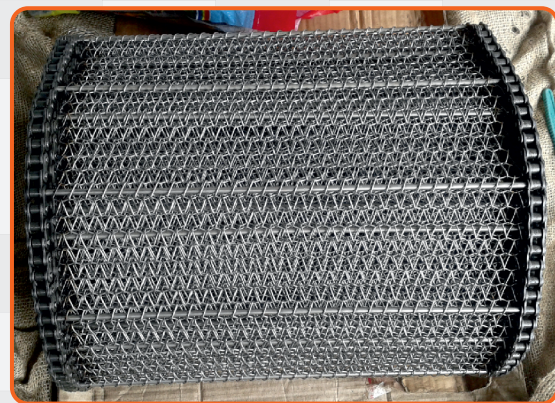

Applications:-

- Auto component washing lines
- Cleaning
- Transfer
- Cooking
- Heating
- Annealing
- Curing systems
- Forming
- Baking systems
- Food processing
- Forging
- Chemical industry
- Wrapping
- Bottling industry

Available Chain:-

- MS transmission chain 1/2", 5/8", 3/4", 1"
- MS conveyor roller chains pitch 1", 1.5", 2", 2.5", 3"
- SS304, SS310, SS316 transmission chain 1/2", 5/8", 3/4", 1"
- SS304 conveyor roller chains pitch 1", 1.5", 2", 2.5", and 3"



OUR ESTEEMED CUSTOMERS

3M India Ltd., Pune
Axiss Systems, Pune
Altotech Infra Red Systems, Pune
Agreecon Industries, Mumbai
Abhiyanta Inc. Co., Bengaluru
Aleg Engineering, Alighad Up
Carraro India Ltd., Pune
Empro Plant Pvt. Ltd., Bengaluru
Exide Battery Ltd., Pune
Fiat India Pvt. Ltd., Pune
Godrej & Boyce Mfg. Co. Ltd., Pune
Geometrix Automation Pvt. Ltd., Pune
Growel India Pvt. Ltd., Pune
I. I. Tropical Meteorology, Pune
Institute Of Chemical Technology, Mumbai
Katlyn Process Pvt. Ltd.,
Kider Instore Ltd., Pune
Lumax Industries, Pune
Mahindra And Mahindra Ltd., Pune
Mahindra Vehical Mfg. Ltd., Chakan
Millennium Engineers Pvt. Ltd., Pune
Mahale Filters Ltd., Pune
Mubea Suspension Pvt. Ltd., Chakan

Morgan Advanced Materials,
Aurangabad
NKE Automation, Italy
Panse Autocomp Pvt. Ltd., Chakan
PMT Machines, Pune
Rinder India Pvt. Ltd., Chakan
SKH Sheet Metals Pvt. Ltd. Pune
SP Auto Parts, Pune
Shree Samarth Engineers, Pune
Shree Shot Eqp. Pvt. Ltd., Aurangabad
Sunrise Internaltion, Mumbai
Surya Marketing, Pune
Science For Society, Mumbai
Techno Enterprisses, Sangali
UGC India Pvt. Ltd., Pune
UMW Dongshine Ltd., Pune
UB Ajanta, Aurangabad
Varroc Polymers Pvt. Ltd., Pune
Vibro Feed Tech, Pune
Vertex Systems, Pune
Westro Engineers, Pune
Wuerth India Ltd., Pune
Yeep India Pvt. Ltd., Pune

